

# HighPROTEC | PROTECTION TECHNOLOGY MADE SIMPLE

## MCDGV4 | GENERATOR DIFFERENTIAL PROTECTION

### APPLICATION

The generator differential protection relay MCDGV4 is a high precision protection for medium and high power generators. The step-up transformer can be integrated into the protection zone (unit protection/ block protection). In addition to the phase and earth differential protection, the device provides a variety of generator-specific protection functions. The package comprises phase, earth current, voltage, frequency and power protection. In addition to that the device offers an undervoltage directional reactive power protection with reconnection function and an adjustable Fault Ride Through (FRT) with AR detection. The intuitive operating concept with plausibility checks and extensive commissioning functions such as the built-in fault simulator allows a safe and time-optimized maintenance and commissioning. The parameter setting and evaluation software Smart view SE can be used consistently across the entire family of devices.



### COMPREHENSIVE GENERATOR PROTECTION PACKAGE

- The Phase and Ground Differential protection package detects electrical faults within the generator or within the generator and the step-up transformer (unit protection)
- Two elements overexcitation protection (overfluxing) e.g. for the protection of the step-up transformer during run-up (V/f)
- Two elements underexcitation in order to detect faulty excitation
- Overload (Stator) / Thermal replica for the detection of long lasting minor overcurrents
- Six elements (voltage dependent) over-current protection (ANSI/IEC/51C/51V)
- Multiple reverse power elements for the protection of the prime mover (Pr,P,Q,S,PF...)
- Negative phase sequence protection
- 100% Stator ground fault protection (via third harmonic)
- Multi level overvoltage protection with settable reset ratio in order to protect the stator winding and the step-up transformer against inadmissible voltages

- Multi level undervoltage protection with settable reset ratio
- Inadvertent energization detection in order to detect the inadvertent supply of the mains voltage to the generator during standstill
- Buchholz supervision via digital input
- Unbalanced voltage protection
- Multi-Password-Level
- Optional temperature supervision via external URTD-box with 12 sensors (Please ask for availability)

### INTERCONNECTION PACKAGE

The comprehensive interconnection package is summarized within one menu:

- FRT (LVRT): Settable FRT-Profiles, optional AR coordinated
- QV-Protection: Undervoltage-Reactive Power protection
- Automatic Reconnection
- Considerably frequency protection package: Six elements configurable as  $f <$ ,  $f >$ ,  $df/dt$  (ROCOF), Vector Surge
- CB-Intertripping
- Synchro check (Generator to mains, mains-to-mains), options e.g. to switch onto dead bus

### RECORDERS

- Disturbance recorder, 120 s non volatile
- Fault recorder
- Event recorder
- Trend recorder: 4000 non volatile entries

### COMMISSIONING SUPPORT

- Integrated fault simulator: current and voltage
- Copy and compare parameter sets
- Configuration files are convertible
- Forcing and disarming of output relays

### COMMUNICATION OPTIONS

- IEC61850
- Profibus DP
- Modbus RTU or Modbus TCP
- IEC60870-5-103

### CONTROL

- of up to six switchgears
- Switchgear wear
- Exchange of single lines

### LOGIC

- Up to 80 logic equations


### TIME SYNCHRONISATION

- SNTP, IRIG-B00X, Modbus, IEC60870-5-103

## FUNCTIONAL OVERVIEW

	Elements	ANSI
<b>Protective Functions</b>		
Generator differential protection, Id>, Id>>	2	87G
Generator- and step-up transformer differential protection (block/unit protection)		87GT
Restricted earth fault IdE>, IdE>>	4	64REF / 87N
I, time overcurrent and short circuit protection, all stages can be configured for directional or non-directional supervision. Tremendous reset options (instantaneous, definite time, reset characteristics according to IEC and ANSI).	6	50P, 51P, 67P
Voltage controlled overcurrent protection by means of adaptive parameters		51C
Voltage dependent overcurrent protection		51V
Negative phase sequence overcurrent protection		51Q
I2>, unbalanced load protection with evaluation of the negative phase sequence currents	2	46
Generator unbalanced	1	46G
Overload protection with thermal replica and separate pick-up values for alarm and trip functions	1	49
IH2/In, inrush detection with evaluation of the 2nd harmonic	1	Inrush
IG, earth overcurrent and short circuit protection, all stages can be configured for directional (multi-polarising) or non-directional supervision. Tremendous reset options (instantaneous, definite time, reset characteristics according to IEC and ANSI).	4	50N, 51N, 67N
IE, sensitive earth overcurrent- and short circuit trip, all steps directional or non-directional	4	50Ns, 51Ns, 67Ns
V<, V>, V(t)<, under- and overvoltage protection, time dependent undervoltage protection	6	27, 59
Voltage asymmetry supervision (V012)		
V1, under and overvoltage in positive phase sequence system	6	47
V2, overvoltage in negative phase sequence system		
Each of the six frequency protection stages can be used as: f< fs, df, dt, ROCOF, DF/DT, vector surge, ...	6	81U/O, 81R, 78
VX, residual voltage protection or bus bar voltage for synchrocheck or 100% - stator ground fault via evaluation of third harmonic	2	27Tn/27A, 59A/59N
ExP, External alarm and trip functions	4	
PQS, Power protection	6	32, 37
PF, Power factor	2	55
FRT (Fault Ride Through including controlled by AR-feature)	27 (t)	27 (t, AR)
Q(V) Protection (undervolt. dep. directional reactive power protection with reclosing disengaging)		
10-Minutes-Mean-Square-Sliding Supervision: adjustable according to VDE-AR 4105		
Synchrocheck		25
Volts / Hertz	2	24
Loss of field (excitation)	2	40
RTD temperature supervision via optional RTD-Box with 12 sensors		
Inadvertent energization		50/27
<b>Control and Logic</b>		
Control: Position indication, supervision time management and interlockings for up to 6 switchgears		
Logic: Up to 80 logic equations, each with 4 inputs, selectable logical gates, timers and memory function		
<b>Supervision Functions</b>		
CBF, circuit breaker failure protection	1	50BF
TCS, trip circuit supervision	1	74TC
LOP, loss of potential	1	60FL
FF, fuse failure protection via digital input	1	60FL
CTS, current transformer supervision	1	60L
CLPU, cold load pickup	1	
SOTF, switch onto fault	1	
THD supervision		
Switchgear wear with programmable wear curves		
Recorders: Disturbance recorder, fault recorder, event recorder, trend recorder		

## FUNCTIONAL OVERVIEW IN ANSI FORM

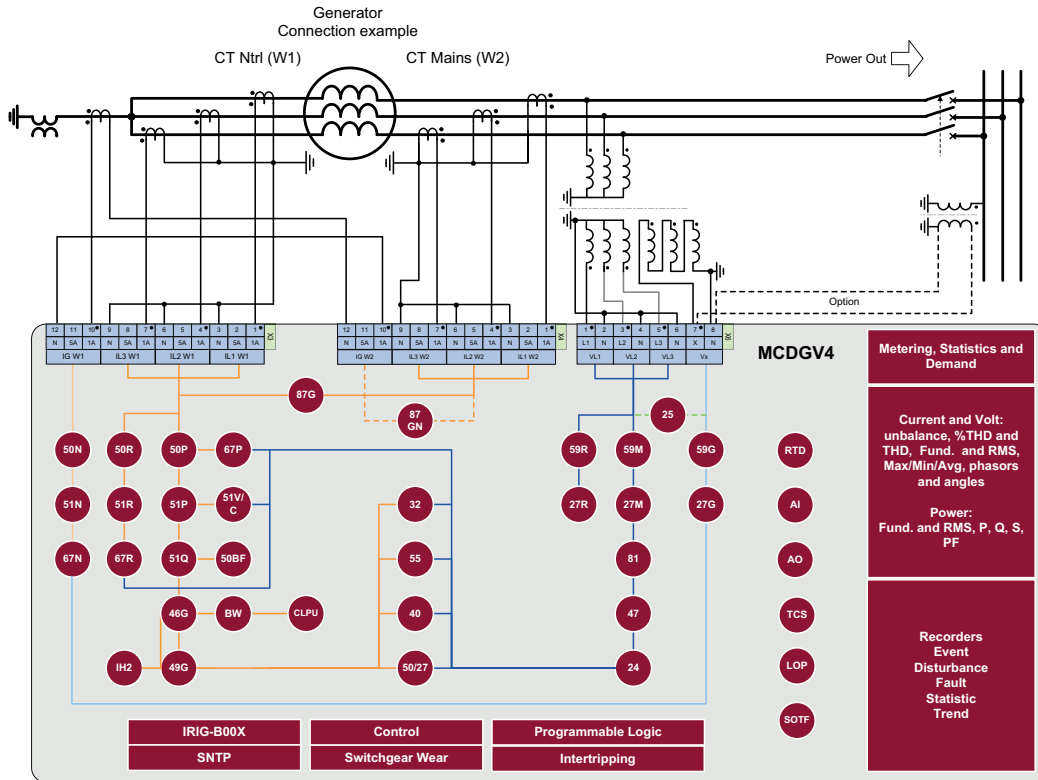

## APPROVALS



certified regarding UL508  
(Industrial Controls)




certified regarding CSA-C22.2 No. 14  
(Industrial Controls)



AI30

Type tested according to IEC60255-1

## CONNECTIONS

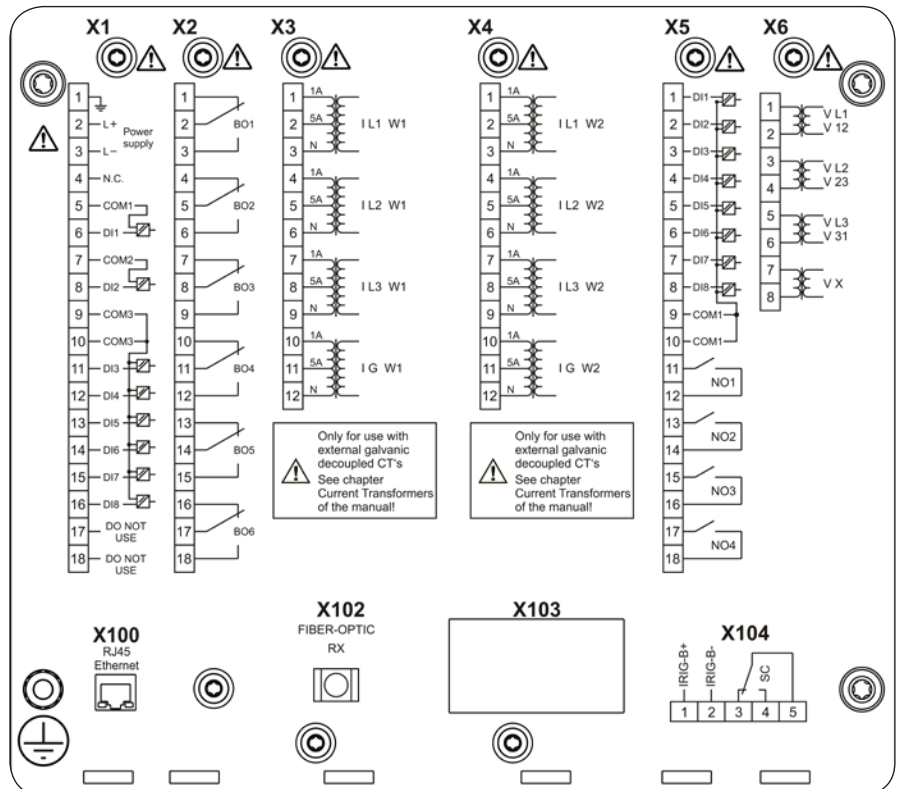

**ORDER FORM MCDGV4**

Generator Differential Protection					MCDGV4
Digital Inputs	Binary output relays	Analog Inputs/Outputs	Housing	Large Display	
16	11	0/0	B2	X	A
8	11	2/2	B2	X	B
24	11	0/0	B2	X	C*
16	16	0/0	B2	X	D*
<b>Hardware variants</b>					
Phase current 1 A/5 A, Ground Current 1 A/5 A					0
Phase current 1 A/5 A, Sensitive Ground Current 1 A/5 A					1
<b>Housing and mounting</b>					
Door mounting					A
Door mounting 19" (flush mounting)					B
<b>Communication protocol</b>					
Without protocol					A
Modbus RTU, IEC60870-5-103, RS485/terminals					B
Modbus TCP, Ethernet 100 MB / RJ45					C
Profibus DP, optic fiber					D
Profibus DP, RS485/D-SUB					E
Modbus RTU, IEC60870-5-103, optic fiber					F
Modbus RTU, IEC60870-5-103, RS485/D-SUB					G
IEC61850, Ethernet 100 MB / RJ45					H
<b>Available menu languages</b>					
English/German/Russian/Polish/Portuguese/French					

The parameterizing- and disturbance analyzing software Smart view is included in the delivery of HighPROTEC devices.

ANSI: 87G, 87GT, 87N (64REF), 24, 40, 59TN/27TN, 50, 51, 67, 51V, 51C, 50N, 51N, 67N, 50Ns, 51Ns, 67Ns, 46, 49, 27, 59, 59N, 81U/O, 81R, 78, 47, 32, 55, 60FL, 86, 50BF, 74TC, 25, 37  
 With control functions for up to 6 switchgears and logic up to 80 equations.

\* Please ask for availability

<b>Current inputs</b>	8 (1 A and 5 A) with automatic short-circuiters
<b>Voltage inputs</b>	4 (0–800 V) or 4 (0–300 V)
<b>Digital Inputs</b>	Switching thresholds adjustable via software
<b>Analog Inputs (Version B)</b>	0...20mA / 4...20mA / 0...10V
<b>Analog Outputs (Version B)</b>	0...20mA / 4...20mA / 0...10V
<b>Power supply</b>	Wide range power supply 24 V <sub>DC</sub> - 270 V <sub>DC</sub> / 48 V <sub>AC</sub> - 230 V <sub>AC</sub> (-20/+10%)
<b>Terminals</b>	All terminals plug type
<b>Type of enclosure</b>	IP54
<b>Dimensions of housing (W x H x D)</b>	19" flush mounting: 212.7 mm x 173 mm x 208 mm 8.374 in. x 7.205 in. x 8.189 in. Door mounting: 212.7 mm x 183 mm x 208 mm 8.374 in. x 7.205 in. x 8.189 in.
<b>Weight (max. components)</b>	approx. 4.7 kg / 10.36 lb



**CONTACT:**

**North & Central America**

Phone: +1 970 962 7331  
 E-mail: SalesPGD\_NAandCA@woodward.com

**South America**

Phone: +55 19 3708 4800  
 E-mail: SalesPGD\_SA@woodward.com

**Europe**

Phone: +49 2152 145 331  
 E-mail: SalesPGD\_EUROPE@woodward.com

**Middle East & Africa**

Phone: +971 2 6275185  
 E-mail: SalesPGD\_MEA@woodward.com

**Russia**

Phone: +7 812 319 3007  
 E-mail: SalesPGD\_RUSSIA@woodward.com

**China**

Phone: +86 512 8818 5515  
 E-mail: SalesPGD\_CHINA@woodward.com

**India**

Phone: +91 124 4399 500  
 E-mail: SalesPGD\_INDIA@woodward.com

**ASEAN & Oceania**

Phone: +49 711 78954 510  
 E-mail: SalesPGD\_ASEAN@woodward.com

© Woodward  
 All Rights Reserved | 02/2014